

Mr LIFT IT
Lifting Equipment Co



Elevator Edition




WWW.MRLIFTIT.COM.AU

PH:+61 2 9755 2225

Minifor

240V 500Kg capacity with up to 250mtr lift height. Can be fitted with remote pendant. Reeving kit allows up to 1000Kg capacity.

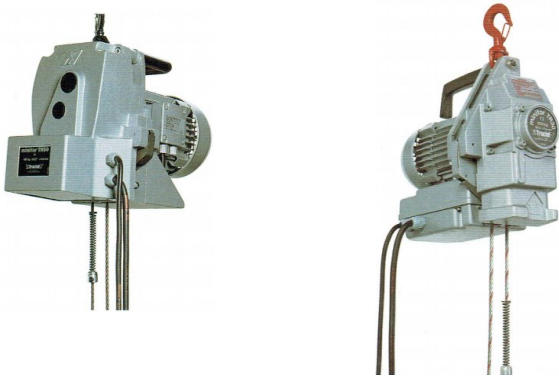

Tirak

Available in sizes from 400kg to 2000Kg, these robust man riding hists are the best in market. 415V with various lift




Bloc stop

A mandatory requirement for use with man riding hoists. Repair and recertification also available in house.



Power Board

32A/415V 3 phase inlet. 20amp 3 phase outlet, dual single phase outlet and phase reversal switch.

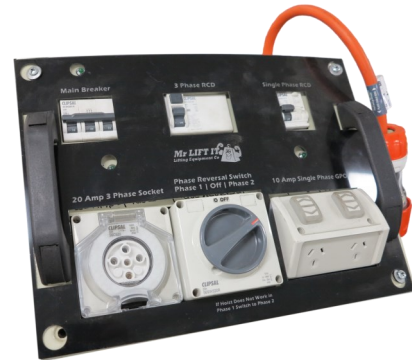

Power Leads

Made to measure 3 phase, single phase and pendant extension leads.



Wire Rope

Genuine Tractel wire rope: 6.5mm, 10.2mm and 14mm. Wire rope end terminating and taper welding also available in house.



Site Box

Various sized site boxes available with options of wheels, lifting points, fold down front , custom paint and decals



Pallecrane

400Kg rated lifter fits to most standard pallet trucks. Optional transport tray allows loads to be picked & carried.



Panel Cart

Easy roll wheels load rated trolley 363kg capacity
Dimension: 1240mm x 635mm x 1160mm



Aluminum gantry

Versatile modular gantry available with wheel sets, various beam lengths and straddle kit to allow for heavier loads.
1500Kg or 3000-Kg with straddle kit.



Rail Trolley

Transport of rails and long objects around site.
275kg capacity



Straddle lifter

Lift and move larger crates and toolboxes around site.
275kg capacity



Load skates

Individual skates or sets from 4T to 100T Capacity. Plastic wheels protect sensitive floors and reduce effort required to move loads.



Audio Visual Unit

A.V unit provides delay before winch movement as well as audible and visual alarms. Fitted with a magnet on the base to fix to metal surface



Top Of Car Pendant

Control of car whilst on inspection mode. Can be wired to specific company requirement upon receipt of appropriate wiring diagram.



Sheave Blocks

Snatch blocks that allow hoists to be rigged 2:1 and increase carrying capacity.
* should only be used by competent persons.



Test Plate

Allows operators to determine the integrity of attachment points prior to use.



Dyna plug

Used to test the integrity of height safety anchor points.



Anchor point

Certified anchor points for attachment of height safety equipment.



Tachometer

Used for the testing of governor tripping speeds. Can be provided as a kit with supporting tooling.



Remote release shackle

Allows loads up to 1500kg to be released safely from a distance when conducting drop tests.



Load cell

Tension and compression load cells from 200kg to 200T. Available as blue tooth to device or screen fitted to the unit.



Traction Belt Cutter

Removes the risk of cutting traction belts with an angle grinder. A safe and accurate tool that does not require power or batteries.



Wire rope cutter

A safe and easy way of cutting hoist ropes up to 19mm. Eliminates the need for grinders and associated hazards.



Bottle Bullet

The safe and easy way of lowering wedge sockets from the hitch point to the top of car for shortening, then reconnection. Available in both metric and imperial sizes.



Hydraulic puller

A simple way of removing sheaves and drive sprockets on escalators.



Hydraulic cylinders

Hydraulic cylinders and pumps to lift, pull and spread in capacities from 5T to 1000T



Chain Block

This chain block can be used completely inverted if required. The swiveling hand chain cover can be rotated to allow the hand chain to be operated from any angle without jamming.



Lever Block

With the aid of a flip out handle this lever block makes 360 deg rotation of the handle easy with less handle effort than its competitors.



Electric chain hoist

Available in various lift capacities and height of lift. Units can be inverted to save the need to carry units up access stairs. Can also be fitted with remote control or ease of use in tight access areas.



Rigging Accessories:

Chain slings, web slings, round slings, shackles, eyebolts, wire rope grips, turnbuckles, lifting beams, crane & fork-lift bins and lifting beams.



Torque wrench

Hand, electric, pneumatic or battery torque wrenches in a variety of sizes for accurate bolt loading.




Bearing heater

Accurately heat bearings before fitting onto shafts.




T Rail lifter

Fits to various T section rails as they are hoisted into the shaft.

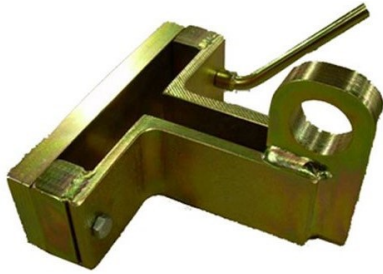

Rail Blocks

A fast and simple way of providing a suspension point when the lift car needs to be hoisted.

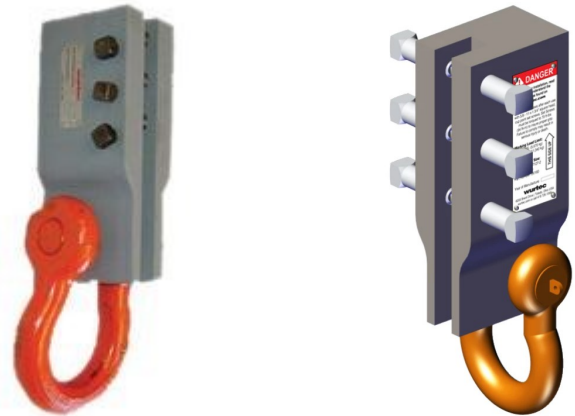

Shortening clamp

Allows ropes to be shortened by attaching between the crosshead and rope group. Lever block is then used to de-tension the ropes before shortening.



2:1 Rope change out tool.

The rope changeout tool designed for 2:1 roping. The tool allows for efficient and safe replacement of up to 6 ropes and is designed to be used on T89 rails.



Elescaf

Access scaffolding for the elevator shaft. Modular easy to install. Suitable for 2 persons.

Max depth: 2200mm

Maximum height: 4200mm



False Car

Used in the construction of high rise elevators without the need for scaffold. Modular and adjustable for varied shaft sizes.



Mr Lift It Pty Ltd.

Phone: +61 2 975502225

Address: 20 Norwich Rd Ingleburn NSW 2565

Email: Sales@mrliftit.com.au

Web: WWW.Mrliftit.com.au

A.B.N 43 154 793 469