## Clip-on & Slide-on Cargo Winches

Complying to AS/NZS 4380-2001



Trucker

## **NEW** Beaver Truckers'

## Mark VI Ratchet Clip-on & Slide-on Cargo Winches LC:3000Ka

Code: 342109-9 Clip-on

C/w 50mm x 9m Blue Polyester Webbing, Hook & Keeper & 2 x 300mm Wear Sleeves.

Complies to AS/NZS4380:2001


The clip-on arms are made of quality steel with a nominal thickness of 12mm to fit on to the rope tie rail for ease of temporary installation. The Winch Body is rated at 3,000KG Lashing Capacity. A lockable latch device to secure the Zinc di-chromate (gold) finish throughout the unit, to prevents corrosion. winch by means of padlock to the truck body when not in use. 2 rolled edge bars to prevent spreading of the winch and to protect the webbing from rolling and catching on an uneven surface. The winch drum is slotted to accommodate both the 50mm Double slotted pawl gear lever 110mm webbing or 6mm Grade 70 Transport Chain to AS/NZS long that allows greater safety and 4344:2001 tightening of the winch gear which also helps to eliminate the possibility of recoil. MKVI Slide-on **Bare Winch** Code: 342009 Solid one piece machine geared wheel consisting of twenty one (21) geared teeth.


A blue polyester compliance tag is on all webbing.

Blue polyester webbing with black stitched edges helps to protect the webbina.

5 black stitched lines to indicate a Maximum Breaking Strain of 5000kg. 2 yellow 300mm protective sleeves protects your strap against sharp edges.

The end fittings are zinc di-chromate (gold) finish hook and keeper that are identifiable by the markings Beaver and LC2500kg.





**MKVI Clip-on Bare Winch** Code: 342109



**Unique Reversible** 

ratchet winch bar

Code: 342420

Clearly Marked with Beaver ID, MK VI & LC: 3000Kg

> 25mm parallel slotted holes on the reinforced winch HUB boss end is incorporated for ratcheting/tightening the winch strap using

Beaver's approved Reversible Ratchet Winch Bar

Code: 342420



The winch is flanged at each end to contain/ maintain the webbing and assist in the flow of the webbing on to the winch

Code: 342009-9

C/w 50mm x 9m Blue Polyester Webbing, Hook & Keeper & 2 x 300mm Wear Sleeves.

Slide-On Style

Cargo Winch

drum.



## Clip-on & Slide-on Cargo Winches

Complying to AS/NZS 4380-2001





Beaver Code	Description	<b>Lashing Capacity</b>
342105B	Clip-on winch (Bare)	2500kg
342105	Clip-on winch c/w 9m strap	2500kg
342105-11	Clip-on winch c/w 11m strap	2500kg




Beaver Code	Description	Lashing Capacity
342005B	Slide-on winch (Bare)	2500kg
342005	Slide-on winch c/w 9m strap	2500kg
342005-11	Slide-on winch c/w 11m stra	p 2500kg



Complies to AS/NZS4380-2001

Beaver Code	Description	<b>Lashing Capacity</b>
342201B	D/ended slide-on winch (Bare)	2500kg
342201	D/ended slide-on winch c/w 9m s	strap 2500kg

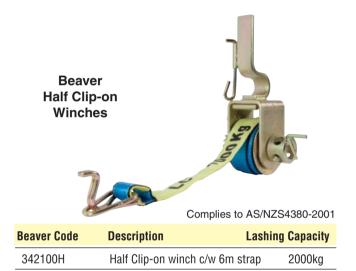





Beaver Code	Description Lashin	g Capacity
342109	Mk VI clip-on winch (Bare)	3000kg
342109-9	Mk VI clip-on winch c/w 9m strap	2500kg
342009	Mk VI slide-on winch (Bare)	3000kg
342009-9	Mk VI slide-on winch c/w 9m strap	2500kg
342420	420 Reversible Ratchet Winch Bar For MK VI only	

**Beaver Weld-on Gate Winches** 



Complies to AS/NZS4380-2001

Beaver Code	Description La	ashing Capacity
342205B	Weld on Gate winch (Bare)	2000kg
342205	Weld on Gate winch c/w 5m strap & Double "J" Hooks 2000kg	



- Winches shall not be loaded in excess of lashing capacity.
- A minimum of two layers of polyester webbing must be wound around the winch drum when tensioning.

